







GENERAL SPECIFICATIONS


- FRAME SIZE : 254x89mm.
- HOUSING : ALUMINIUM ALLOY
- IMPELLER : PBT THERMOPLASTIC UL94V-0
- BEARING TYPE : BALL BEARING
- OPERATION TEMPERATURE : -10°C - +65°C
- RELATIVE HUMIDITY : 35% ~ 85%
- MOTOR : **CAPACITOR-RUN INDUCTION MOTOR**
IMPEDANCE PROTECTED



WB259H3PC...

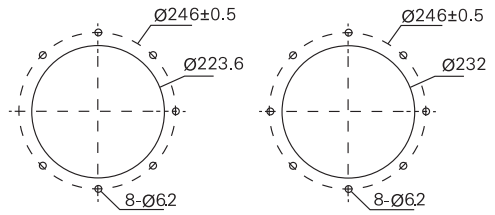


* หน่วย : mm. *


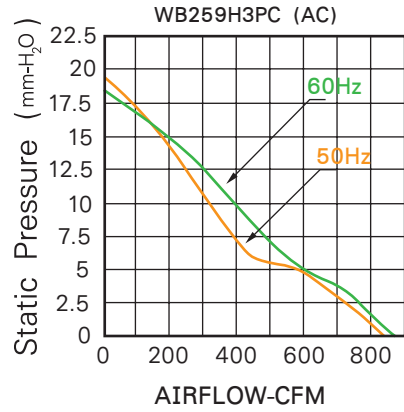


MODEL	VOLTAGE (V)	FREQ (HZ)	CURRENT (A)	POWER (W)	SPEED (RPM)	NOISE (DBA)	AIRFLOW (CFM)
WB259H3PC-A1L-G	100-125vac	50/60	0.7/0.85	95/100	2500/2850	68/70	810/880
WB259H3PC-A2L-G	200-240vac	50/60	0.6/0.7	105/135	2500/2850	68/70	810/880

อุปกรณ์เสริม






ตะแกรงรุ่น G-259



* หน่วย : mm. *






ฟิลเตอร์ WFP-806



* หน่วย : mm. *



ฟิลเตอร์กันน้ำ WFU-9806P2



* หน่วย : mm. *