

GENERAL SPECIFICATIONS

FRAME SIZE : 280x280x80mm.

HOUSING : ALUMINIUM ALLOY


IMPELLER : METAL

BEARING TYPE : BALL BEARING


OPERATION TEMPERATURE : -10°C - +65°C

RELATIVE HUMIDITY : 35% ~ 85%

MOTOR : **CAPACITOR-RUN INDUCTION MOTOR**
IMPEDANCE PROTECTED

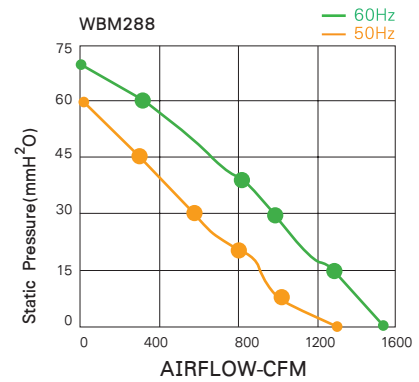


WB288H7MC....

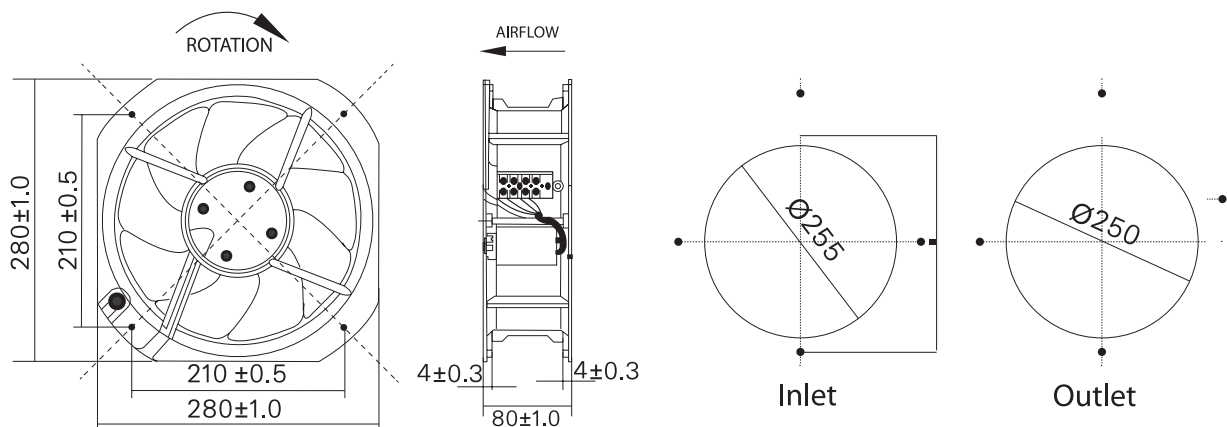



* หน่วย : mm. *

MODEL	VOLTAGE (V)	FREQ (HZ)	CURRENT (A)	POWER (W)	SPEED (RPM)	NOISE (DBA)	AIRFLOW (CFM)
WB288H7MC-A1L-G	100-125vac	50/60	1.20	120	2400/2500	65/70	1341/1512
WB288H7MC-A2L-G	200-240vac	50/60	0.55	120	2400/2500	65/70	1341/1512

อุปกรณ์เสริม



ตะแกรกรุ่น G-288
ราคา 220 บาท



* หน่วย : mm. *

* ราคาสินค้าไม่รวมภาษีมูลค่าเพิ่มและเปลี่ยนแปลงได้โดยไม่ต้องแจ้งให้ทราบล่วงหน้า *