





GENERAL SPECIFICATIONS

FRAME SIZE : 172x150x55mm.
HOUSING : MAGNESIUM ALLOY
IMPELLER : MAGNESIUM ALLOY
BEARING TYPE : BALL BEARING
OPERATION TEMPERATURE : -10°C - +100°C
RELATIVE HUMIDITY : 35% ~ 85%
MOTOR : **SQUIRREL CAGE MOTOR**
THERMALLY PROTECTED

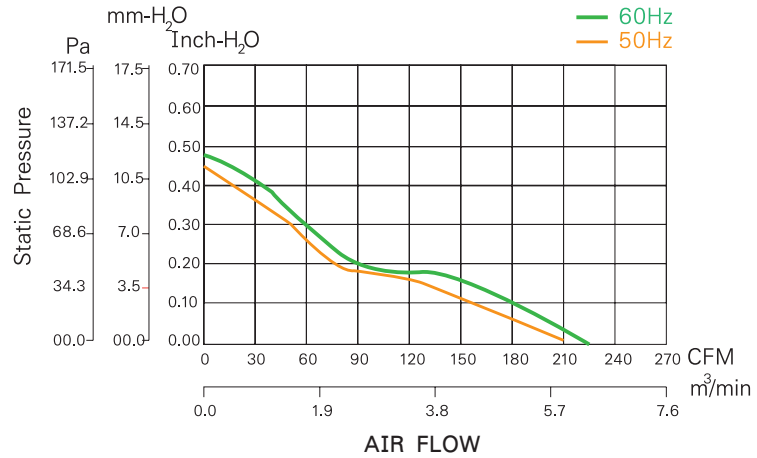

WB1725H5MS...

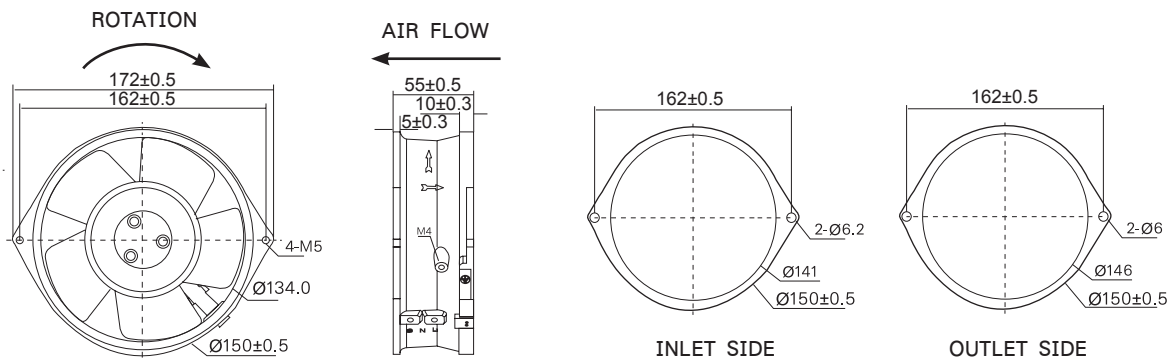

* หน่วย : mm. *

MODEL	VOLTAGE (VAC)	FREQ (HZ)	CURRENT (A)	POWER (W)	SPEED (RPM)	NOISE (DBA)	AIRFLOW (CFM)
WB1725H5MS-A1L-G(H.T.R.100)IP55	110-120	50/60	0.48/0.44	45/42	2600/2900	58/60	210/230
WB1725H5MS-A2L-G(H.T.R.100)IP55	220-240	50/60	0.28/0.25	45/42	2600/2900	58/60	210/230

อุปกรณ์เสริม

*ดูรายละเอียดหน้า 18 *



อุปกรณ์ที่ใช้ร่วมกัน

*ดูรายละเอียดหน้า 70 *

Section 1