

GENERAL SPECIFICATIONS

FRAME SIZE : 254x89mm.

HOUSING : ALUMINIUM ALLOY

IMPELLER : MAGNEIUM ALLOY


BEARING TYPE : BALL BEARING

OPERATION TEMPERATURE : -10°C - +100°C





RELATIVE HUMIDITY : 35% ~ 85%

MOTOR : SHADED POLE INDUCTION MOTOR

IMPEDANCE PROTECTED

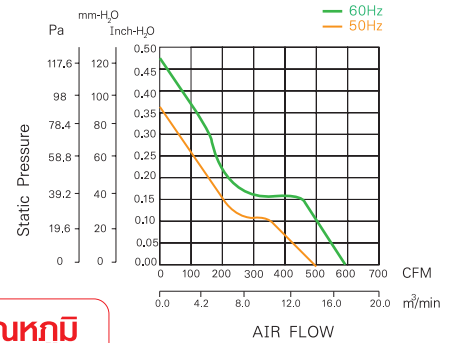

WB2509H5MS...





* หน่วย : mm. *

MODEL	VOLTAGE (VAC)	FREQ (HZ)	CURRENT (A)	POWER (W)	SPEED (RPM)	NOISE (DBA)	AIRFLOW (CFM)
WB2509H5MS-A2L-G(H.T.R.100)IP55	220-240	50/60	0.31/0.29	43/44	1400/1700	53/56	495/589


อุปกรณ์เสริม






ตะแกรงรุ่น G-259



* หน่วย : mm. *





ฟิลเตอร์ WFP-806




* หน่วย : mm. *



ฟิลเตอร์กันน้ำ WFU-9806P2



* หน่วย : mm. *



อุปกรณ์ที่ใช้ร่วมกัน
*ดูรายละเอียดหน้า 70 *
Section 1