



GENERAL SPECIFICATIONS

FRAME SIZE : 254x89mm.
HOUSING : ALUMINIUM ALLOY
IMPELLER : MAGNEIUM ALLOY
BEARING TYPE : BALL BEARING
OPERATION TEMPERATURE : -10°C - +100°C
RELATIVE HUMIDITY : 35% ~ 85%
MOTOR : **SHADED POLE INDUCTION MOTOR**
IMPEDANCE PROTECTED

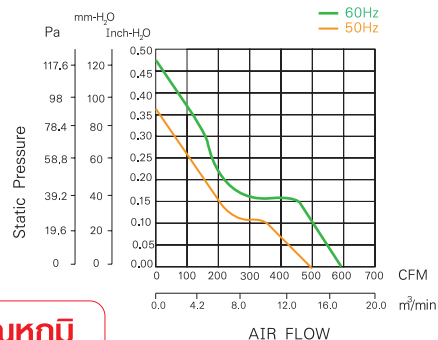


WB2509H5MS...

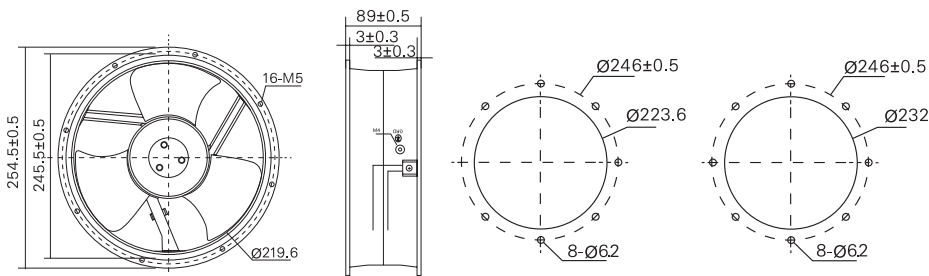



* หน่วย : mm. *

MODEL	VOLTAGE (VAC)	FREQ (HZ)	CURRENT (A)	POWER (W)	SPEED (RPM)	NOISE (DBA)	AIRFLOW (CFM)
WB2509H5MS-A2L-G(H.T.R.100)IP55	220-240	50/60	0.31/0.29	43/44	1400/1700	53/56	495/589


อุปกรณ์เสริม






ตะแกรงรุ่น G-259



* หน่วย : mm. *





ฟิลเตอร์ WFP-806




* หน่วย : mm. *



ฟิลเตอร์กันน้ำ WFU-9806P2



* หน่วย : mm. *



อุปกรณ์ที่ใช้ร่วมกัน
ดูรายละเอียดหน้า 70
Section 1

* ราคาสินค้าไม่รวมภาษีมูลค่าเพิ่มและเปลี่ยนแปลงได้โดยไม่ต้องแจ้งให้ทราบล่วงหน้า *