



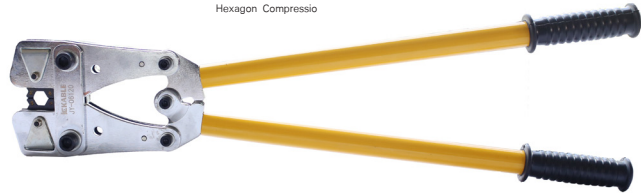

# JY-06120

For cable lugs 6-120 mm<sup>2</sup>  
With moveable and revolving dies




## คีมย้ำหางปลาเปลี่ยนแบบหกเหลี่ยม

Model	Application Range			Weight Kg.	Length mm.
	JIS mm <sup>2</sup>	DIN mm <sup>2</sup>	AWG/MCM		
JY-06120	5.5 - 100	6 - 120	10 - 250	3.8	650


# JT-150

For cable lugs 10-150 mm<sup>2</sup>  
Head rotates 360°  
The handle length can be adjustable



# JT-300

For cable lugs 16-300 mm<sup>2</sup>  
Head rotates 360°  
The handle length can be adjustable



## คีมย้ำหางปลาเปลี่ยนแบบหกเหลี่ยม

Model	Storke	Application Range			Standard Dies mm <sup>2</sup>	Weight Kg.	Length mm.
		JIS mm <sup>2</sup>	DIN mm <sup>2</sup>	AWG/MCM			
JT-150	9 mm	8-120	10-150	8-300	Die 9 set: CU10/AL6, CU16/AL10, CU25/AL16 CU35/AL25, CU50/AL35, CU70/AL50 CU95/AL70 CU120/AL95, CU150/AL120	2.4	420-580
JT-300	15 mm	14-250	16-300	8-600	Die 11 set: CU16/AL10, CU25/AL16 CU35/AL25 CU50/AL35, CU70/AL50, CU95/AL70 CU120/AL95, CU150/AL120, CU185/AL150 CU240/AL185 CU300/AL240	4	530-760

