





ขนาดกะทัดรัด ไม่เปลืองพื้นที่ติดตั้ง


CONNECTION DIAGRAM




DP-T60A

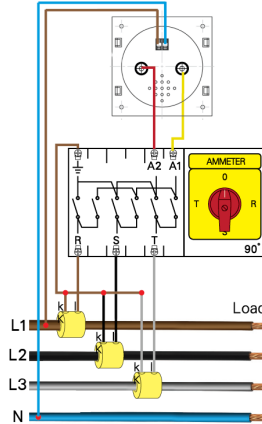

DP-T80A







DP-T60V

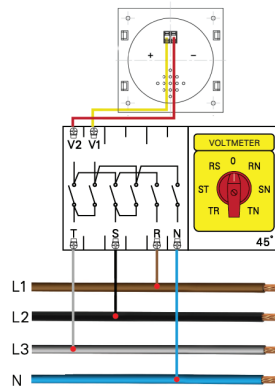

DP-T80V

SPECIFICATIONS

Rated voltage	: AC 500V
Rated current	: AC 5A
Current Overload Rating	: 1.2X rating (Continuous)
Voltage Overload Rating	: 1.2X rating (Continuous)
Power consumption	: <4VA / phase
Internal resistance	: Current < 200mΩ Voltage ≥ 1kΩ / V
Frequency	: 45-65Hz.
Accuracy Class	: 1.0
Operating temperature	: -10°C to +55°C
Storage temperature	: -20°C to +70°C
Relative humidity	: ≤ 80% RH
Insulation resistance	: 100mΩ
AC Withstand voltage	: AC 2000V
Display	: High-Brightness



DP-T Series Physical Dimension (Unit : mm)

Model	A	B	B1	C	D	ØE	ØF
DP-T60	60	40	48	12	48	49	52
DP-T80	80	40	48	13	65	64	66

ดิจิตอลพานาเลมิเตอร์ (Digital Panel Meter)

~1.0

รุ่น (Model)	Connection	Measuring Range	Accuracy Class	Packing Pcs/Ctns
DP-T60V	Line to Neutral Line to Line	200-500V	1	100
DP-T60A	Direct	5A 10A 15A 20A 30A 40A 50A 60A	1	100
	Through current transformers (5A)	0-9999A (CT) X/5A	1	100
DP-T80V	Line to Neutral Line to Line	200-500V	1	100
DP-T80A	Direct	5A 10A 15A 20A 30A 40A 50A 60A	1	100
	Through current transformers (5A)	0-9999A (CT) X/5A	1	100

