





ขนาดกะทัดรัด ไม่เปลืองพื้นที่ติดตั้ง


CONNECTION DIAGRAM




DP-T60A

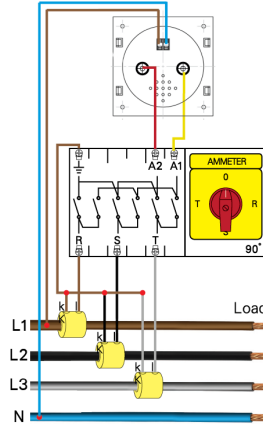

DP-T80A







DP-T60V

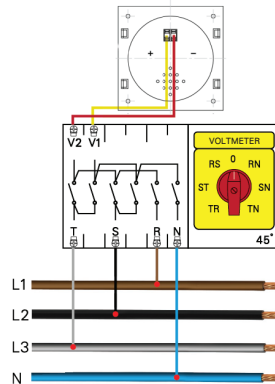

DP-T80V

SPECIFICATIONS

|                         |                                        |
|-------------------------|----------------------------------------|
| Rated voltage           | : AC 500V                              |
| Rated current           | : AC 5A                                |
| Current Overload Rating | : 1.2X rating (Continuous)             |
| Voltage Overload Rating | : 1.2X rating (Continuous)             |
| Power consumption       | : <4VA / phase                         |
| Internal resistance     | : Current < 200mΩ<br>Voltage ≥ 1kΩ / V |
| Frequency               | : 45-65Hz.                             |
| Accuracy Class          | : 1.0                                  |
| Operating temperature   | : -10°C to +55°C                       |
| Storage temperature     | : -20°C to +70°C                       |
| Relative humidity       | : ≤ 80% RH                             |
| Insulation resistance   | : 100mΩ                                |
| AC Withstand voltage    | : AC 2000V                             |
| Display                 | : High-Brightness                      |



DP-T Series Physical Dimension (Unit : mm)

| Model  | A  | B  | B1 | C  | D  | ØE | ØF |
|--------|----|----|----|----|----|----|----|
| DP-T60 | 60 | 40 | 48 | 12 | 48 | 49 | 52 |
| DP-T80 | 80 | 40 | 48 | 13 | 65 | 64 | 66 |

ดิจิตอลพานาไมเตอร์ (Digital Panel Meter)

~1.0

| รุ่น (Model) | Connection                        | Measuring Range   |     |     |     | Accuracy Class | Packing Pcs/Ctns |
|--------------|-----------------------------------|-------------------|-----|-----|-----|----------------|------------------|
| DP-T60V      | Line to Neutral<br>Line to Line   | 200-500V          |     |     |     | 1              | 100              |
| DP-T60A      | Direct                            | 5A                | 10A | 15A | 20A | 1              | 100              |
|              | Through current transformers (5A) | 30A               | 40A | 50A | 60A |                |                  |
| DP-T80V      | Line to Neutral<br>Line to Line   | 200-500V          |     |     |     | 1              | 100              |
| DP-T80A      | Direct                            | 5A                | 10A | 15A | 20A | 1              | 100              |
|              | Through current transformers (5A) | 30A               | 40A | 50A | 60A |                |                  |
|              |                                   | 0-9999A (CT) X/5A |     |     |     | 1              | 100              |

