



SD-96 Series  
Moving Coil Type




SD-96FP

**Specifications**


- Reference standard : EN/IEC 60051
- Case-dimensions : DIN 43700
- Scales and pointer : DIN 43802
- Magnetic influence : DIN 43780
- Safety : IEC 1010-1
- Housing : Self-extinguishing polymer ABS according to UL94V-0
- Protection for housing : IP40 as standard
- Protection for terminals : IP20 with back cover
- Accuracy class : 1.5
- Operating frequency : 45~65Hz
- Dielectric test voltage : 2KV/ 50Hz/ 1minute
- Overload AC voltage : x1.2 continuous(x2 for 5 seconds)
- AC Current : x1.2 continuous(x10 for 5 seconds)
- Power consumption**
- Voltage :  $\leq 1.8VA$  for 500V
- Current :  $\leq 0.7VA$  for 5A
- Active power factor :  $\cos\phi -0.5 \cos...1...0.5$  ind
- Reference temperature :  $23^{\circ}C \pm 2^{\circ}C$
- Operating temperature :  $-25^{\circ}C$  to  $40^{\circ}C$
- Storage temperature :  $-40^{\circ}C$  to  $70^{\circ}C$
- Relative humidity :  $\leq 85\%$

มิเตอร์วัดความถี่ (Frequency Meter) ~1.5

รุ่น (Model)	Type	Accuracy Class	Connection Input Voltage	Measuring Range
SD-96FP	แบบเข็ม	1.5	220V, 380V	45...55 Hz 45...65 Hz

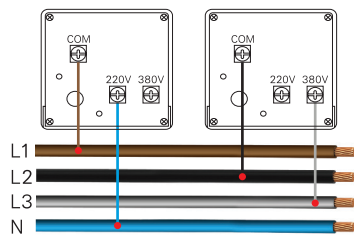

CONNECTION DIAGRAMS

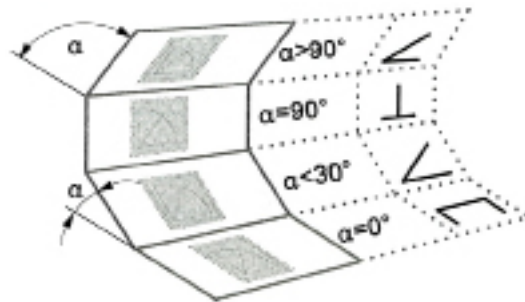

Markings concerning the working position

DIMENSION

