


SPECIFICATION


- Product Standard : IEC 61869-2;GB20840.1;GB20840.2
- Rated primary current : 5A-2500A
- Rated secondary current : 5A
- Accuracy Class : 0.5
- Highest voltage : 0.72Kv
- Operating frequency : 50/60Hz
- Withstand voltage : 4kV
- Security factor : FS_≤5
- Case material : UL flame retardant rating UL94 V-2
- Continuous current : 1.2xIn
- Insulation test : 3kV/1min
- Operating temperature : -25 to + 55 °C
- Storage temperature : -35 to + 70 °C

MAIN FEATURES :


- ✓ High accuracy
- ✓ High burden output
- ✓ Small size

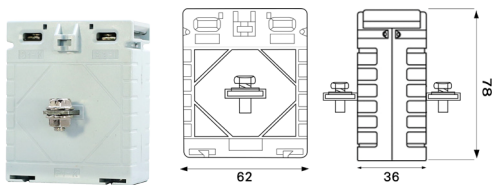


CP62/SW

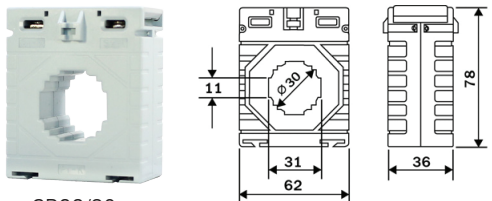


CP62/30

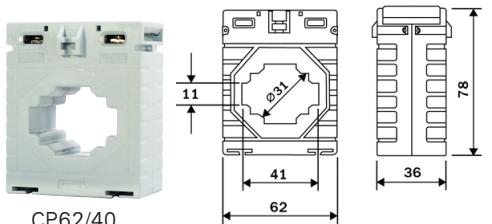


CP62/40

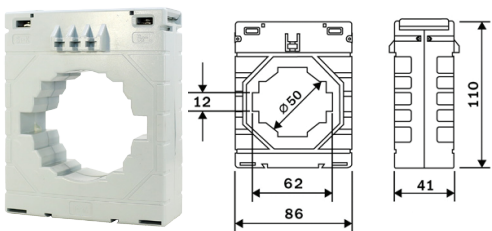

CP86/60

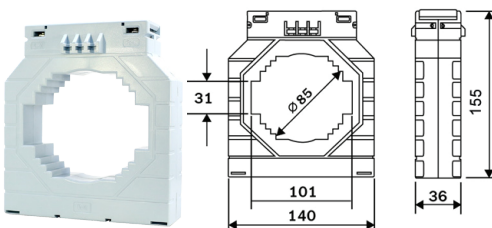

CP140/100

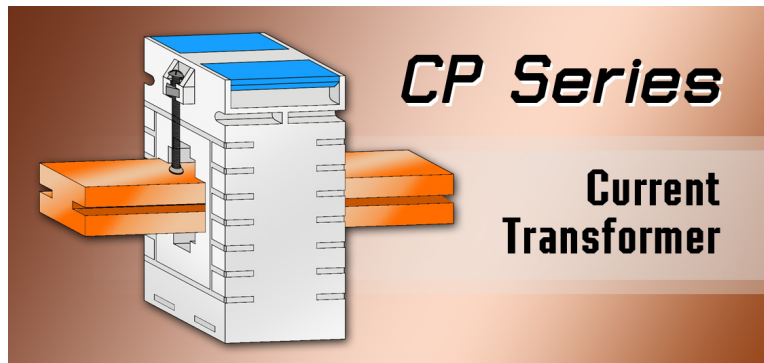

| CP-Series | | | | Class 0.5 | |
|--------------|---------------|---------------|-------------------|---------------------|-----------------|
| รุ่น (Model) | Window | Burden Output | Current (A) | Through No. (Turns) | Packing Pcs/Ctn |
| | | | Primary/Secondary | | |
| CP62/SW | Wound Primary | 5VA | 5/5A | - | 50 |
| | | | 10/5A | - | 50 |
| | | | 15/5A | - | 50 |
| | | | 20/5A | - | 50 |
| | | | 30/5A | - | 50 |
| | | | 40/5A | - | 50 |
| | | | 50/5A | - | 50 |
| CP62/30 | 30x10 mm. | 5VA | 100/5A | 1 | 50 |
| | | | 150/5A | 1 | 50 |
| | | | 200/5A | 1 | 50 |
| CP62/40 | 40x10 mm. | 5VA | 250/5A | 1 | 50 |
| | | | 300/5A | 1 | 50 |
| | | | 400/5A | 1 | 50 |
| CP86/60 | 60x10 mm. | 15VA | 400/5A | 1 | 50 |
| | | | 500/5A | 1 | 50 |
| | | | 600/5A | 1 | 50 |
| CP140/100 | 100x30 mm. | 30VA | 800/5A | 1 | 50 |
| | | | 1000/5A | 1 | 20 |
| | | | 1200/5A | 1 | 20 |
| | | | 1250/5A | 1 | 20 |
| | | 45VA | 1500/5A | 1 | 20 |
| | | | 1600/5A | 1 | 20 |
| | | | 2000/5A | 1 | 20 |
| 2500/5A | 1 | 20 | | | |

