




SPECIFICATION


- Product Standard : IEC 61869-2;GB20840.1;GB20840.2
- Rated primary current : 5A-2500A
- Rated secondary current : 5A
- Accuracy Class : 0.5
- Highest voltage : 0.72Kv
- Operating frequency : 50/60Hz
- Withstand voltage : 4kV
- Security factor : $FS \leq 5$
- Case material : UL flame retardant rating UL94 V-2
- Continuous current : $1.2 \times I_n$
- Insulation test : 3kV/1min
- Operating temperature : -25 to $+55^\circ\text{C}$
- Storage temperature : -35 to $+70^\circ\text{C}$

MAIN FEATURES :


- ✓ High accuracy
- ✓ High burden output
- ✓ Small size

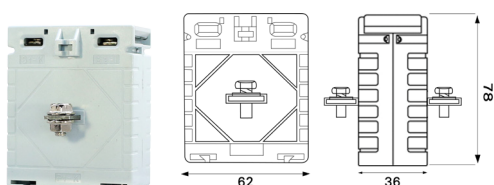


CP62/SW

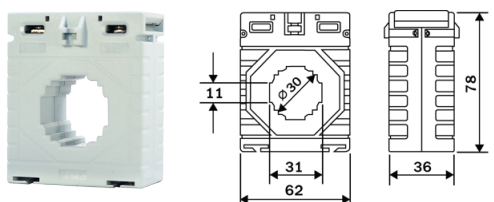


CP62/30

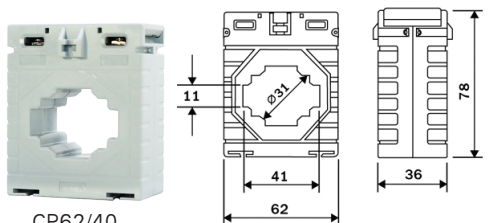


CP62/40

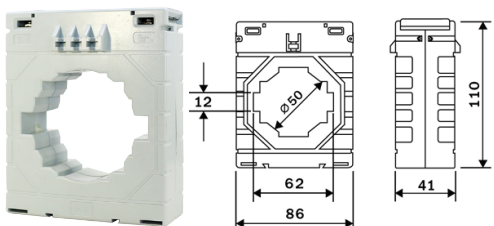

CP86/60

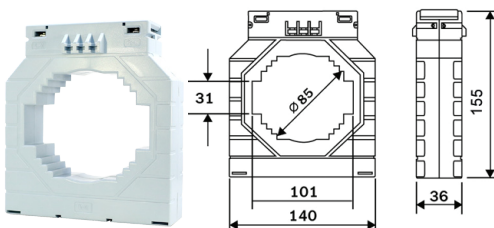

CP140/100

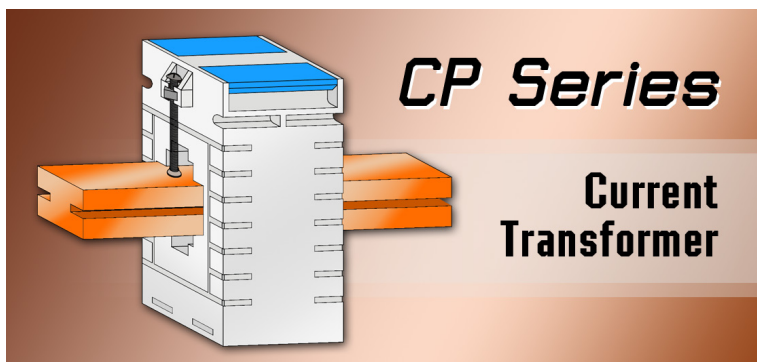

CP-Series				Class 0.5	
รุ่น (Model)	Window	Burden Output	Current (A) Primary/Secondary	Through No.(Turns)	Packing Pcs/Ctn
CP62/SW	Wound Primary	5VA	5/5A	-	50
			10/5A	-	50
			15/5A	-	50
			20/5A	-	50
			30/5A	-	50
			40/5A	-	50
			50/5A	-	50
CP62/30	30x10 mm.	5VA	60/5A	-	50
			100/5A	1	50
			150/5A	1	50
CP62/40	40x10 mm.	5VA	200/5A	1	50
			250/5A	1	50
			300/5A	1	50
CP86/60	60x10 mm.	15VA	400/5A	1	50
			500/5A	1	50
			600/5A	1	50
CP140/100	100x30 mm.	30VA	800/5A	1	50
			1000/5A	1	20
			1200/5A	1	20
			1250/5A	1	20
		45VA	1500/5A	1	20
			1600/5A	1	20
			2000/5A	1	20
			2500/5A	1	20

