



SPECIFICATION


- Design according to : IEC/EN 60898-1
- Rated Voltage : AC 230/400V
- Rated Frequency : 50/60 Hz
- Rated breaking capacity : AC 6 kA
- Characteristics : Class C
- Permissible back-up fuse protection : max. 100 A gL (>10 kA)
- Selectivity class : 3
- Tripping Temperature : between -5°C and + 40°C
- Degree of protection : built-in switch IP40
- Electrical life : 4000 operating cycles
- Mechanical life : 10000 operating cycles

FEATURES

- Frame size : 45 mm
- Socket size : 80 mm
- Device width : 17.5 mm per pole(1 mod.)
- Mounting : quick fastening with 2 lock-in positions on DIN rail EN50022

APPLICATION

- Protect damage caused by Overload & Short-Circuit

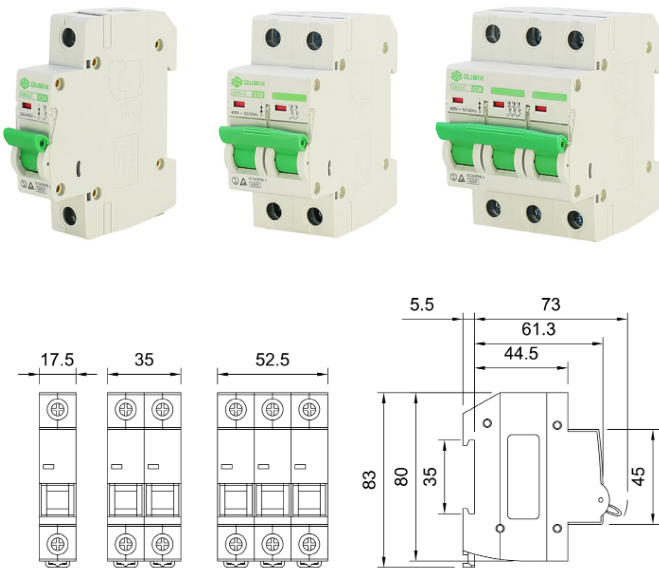

MCB		SB6LC-Series
รุ่น (Model)	Rated Current	Rated breaking capacity IEC/EN60898-1
SB6LC	1A	6KA
	2A	
	3A	
	4A	
	6A	
	10A	
	16A	
	20A	
	25A	
	32A	
	40A	
	50A	
63A		

