

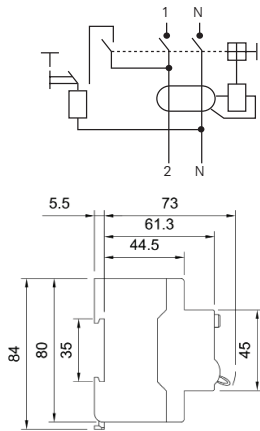


SPECIFICATION


- Design according to : IEC/EN61008-1 , IEC/EN61009-1
- No. of poles : 2P, 4P
- Rated current : 16A, 20A, 25A, 32A, 40A, 63A, 80A, 100A
- Rated residual Operating current : 10mA, 30mA
- Rated voltage : 230V / 400VAC
- Rated frequency : 50/60Hz
- Rated conditional
Residual short circuit current $I\Delta c$: 10000A
- Tripping duration : instantaneous tripping $\leq 0.1s$
- Residual tripping current range : $0.5I\Delta n \sim I\Delta n$
- Electro-mechanical endurance : 4000 cycles
- Connection capacity : Rigid conductor 25mm²

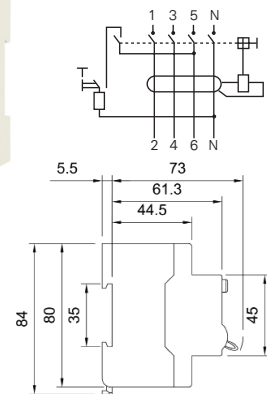

RCCB (อุปกรณ์ป้องกันไฟดูด-ไฟรั่ว)			PR8HM-Series	
รุ่น (Model)	Pole	Rated breaking capacity IEC/EN61008-1	พิกัดกระแสไฟรั่ว-ไฟดูด	Rated Current
PR8HM-216-10	2 Pole	10KA	10mA	16Amp
PR8HM-216-30			30mA	16Amp
PR8HM-225-30			30mA	25Amp
PR8HM-232-30			30mA	32Amp
PR8HM-240-30			30mA	40Amp
PR8HM-263-30			30mA	63Amp
PR8HM-280-30			30mA	80Amp
PR8HM-2100-30			30mA	100Amp

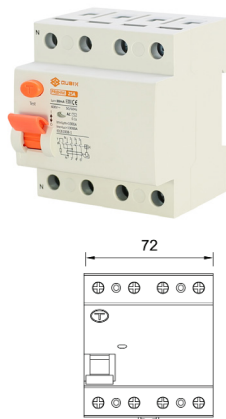

RCCB (อุปกรณ์ป้องกันไฟดูด-ไฟรั่ว)			PR8HM-Series	
รุ่น (Model)	Pole	Rated breaking capacity IEC/EN61008-1	พิกัดกระแสไฟรั่ว-ไฟดูด	Rated Current
PR8HM-416-30	4 Pole	10KA	30mA	16Amp
PR8HM-425-30			30mA	25Amp
PR8HM-432-30			30mA	32Amp
PR8HM-440-30			30mA	40Amp
PR8HM-463-30			30mA	63Amp
PR8HM-480-30			30mA	80Amp
PR8HM-4100-30			30mA	100Amp



CONSUMER UNIT			
รุ่น (Model)	Modula type	จำนวนช่อง	IP
SDBSP-2	MCB, RCCB, RCBO	2 ช่อง	IP30
SDBSP-4		4 ช่อง	IP30

