
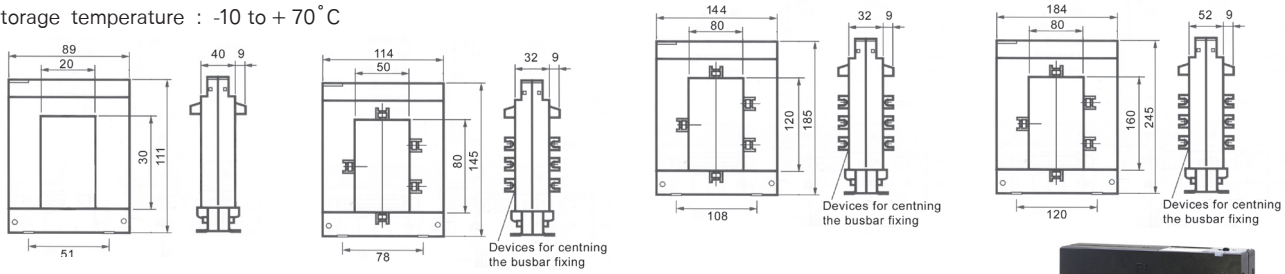


**SPECIFICATION**

- Product Standard : IEC 60044-1;GB1208-2006
- Rated primary current : 100A - 5000A
- Rated secondary current : 5A
- Accuracy Class : 0.5 , 1.0 (Depend on primary current)
- Highest voltage : 0.72Kv
- Operating frequency : 50/60Hz
- Withstand voltage : 3kV
- Security factor :  $FS \leq 5$
- Case material : UL flame retardant rating UL94 V-2
- Continuous current :  $1.2 \times I_n$
- Insulation test : 3kV/1min
- Operating temperature : -10 to + 55 °C
- Storage temperature : -10 to + 70 °C

**MAIN FEATURES :**

- ✓ Easy to mounting; no need to remove Busbar
- ✓ Wide range of Primary Current
- ✓ Shorter Installation time



TP-23



TP-58



TP-812



TP-816

**TP-Series (Split Core)**

รุ่น (Model)	Window	Burden Output	Accuracy Class	Ratio Current (A) Primary / Secondary	Through	Packing	
					No. (Turns)	Pc/Box	Pcs/Ctn
TP-23	20x30 mm	2.5 VA	1	100/5A	1	1	24
		3.75 VA	1	150/5A	1	1	24
		5 VA	1	200/5A	1	1	24
		5 VA	1	250/5A	1	1	24
TP-58	50x80 mm	5 VA	1	250/5A	1	1	24
		5 VA	1	300/5A	1	1	24
		5 VA	0.5	400/5A	1	1	24
		5 VA	0.5	500/5A	1	1	24
		5 VA	0.5	600/5A	1	1	24
		5 VA	0.5	800/5A	1	1	24
TP-812	80x120 mm	10 VA	0.5	1000/5A	1	1	12
		10 VA	0.5	1200/5A	1	1	12
		10 VA	0.5	1250/5A	1	1	12
		10 VA	0.5	1500/5A	1	1	12
		10 VA	0.5	1600/5A	1	1	12
TP-816	80x160 mm	15 VA	0.5	2000/5A	1	1	12
		15 VA	0.5	2500/5A	1	1	12
		15 VA	0.5	3000/5A	1	1	12
		20 VA	0.5	3200/5A	1	1	12
		20 VA	0.5	4000/5A	1	1	12
		20 VA	0.5	5000/5A	1	1	12

