


SPECIFICATION

Standard	: IEC / EN60947
Rated operation current	: 16A
Rated insulating voltage	: 690V
Rated impulse withstand voltage(Uimp)	: 6kV
Frequency	: 50/60Hz
Front protection	: IP20
Mechanical life	: 100,000 operation at 300 cycles/hour.
Electrical life	: 10,000 operation at 120 cycles/hour.



SA16-4-61325-A03

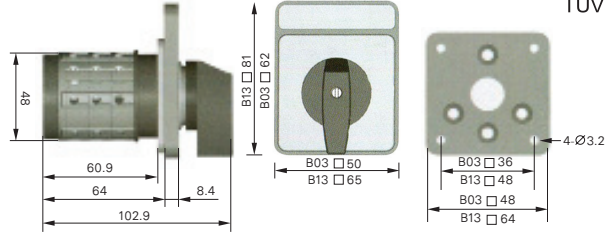



SA16-4-61325-B03



SA16-4-61325-A13



SA16-4-61325-B13



แอมป์มิเตอร์สวิตช์ (Ammeter Switches - Heavy Duty)

รุ่น (Model)	Rated(AC-23A/B)			Mounting size	Script plate marking size
	Current	Voltage	KW		
SA16-4-61325-A03	16A	380-440V	5.5KW	48x48mm.	48x60 mm. AMMETER 0 T R S
SA16-4-61325-B03	16A	380-440V	5.5KW		
SA16-4-61325-A13	16A	380-440V	5.5KW	64x64mm.	64x80 mm. AMMETER 0 T R S
SA16-4-61325-B13	16A	380-440V	5.5KW		



SA16-7-61313-A03





SA16-7-61313-B03



SA16-7-61313-A13



SA16-7-61313-B13

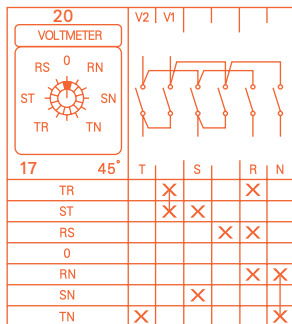

โวลต์มิเตอร์สวิตช์ (Voltmeter Switches - Heavy Duty)

รุ่น (Model)	Rated(AC-23A/B)			Mounting size	Script plate marking
	Current	Voltage	KW		
SA16-7-61313-A03	16A	380-440V	5.5KW	48x48mm.	48x60 mm. VOLTMETER RS RN ST SN TR TN
SA16-7-61313-B03	16A	380-440V	5.5KW		
SA16-7-61313-A13	16A	380-440V	5.5KW	64x64mm.	64x80 mm. VOLTMETER RS RN ST SN TR TN
SA16-7-61313-B13	16A	380-440V	5.5KW		

