




GENERAL SPECIFICATIONS

FRAME SIZE : 222x60mm.
HOUSING : ALUMINIUM ALLOY
IMPELLER : PBT THERMOPLASTIC UL94V-0
BEARING TYPE : BALL BEARING
OPERATION TEMPERATURE : -10°C - +65°C
RELATIVE HUMIDITY : 35% ~ 85%
MOTOR : **CAPACITOR-RUN INDUCTION MOTOR**
IMPEDANCE PROTECTED

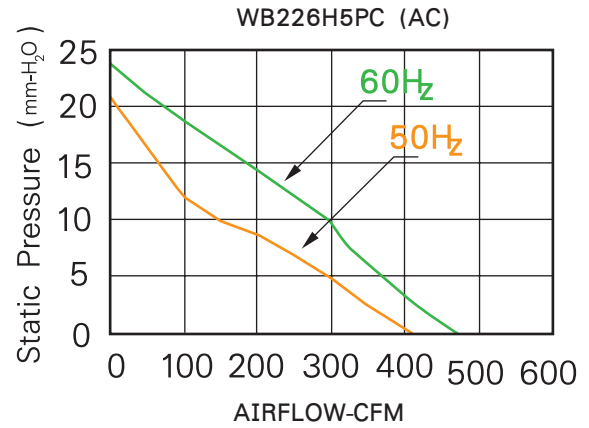

WB226H5PC...

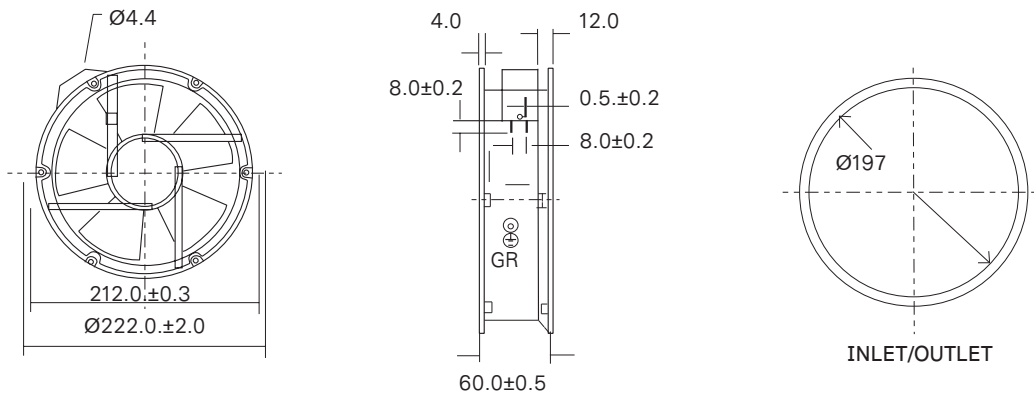

* หน่วย : mm. *

MODEL	VOLTAGE (V)	FREQ (HZ)	CURRENT (A)	POWER (W)	SPEED (RPM)	NOISE (DBA)	AIRFLOW (CFM)
WB226H5PC-A1L-G	100-125vac	50/60	0.42/0.46	50/60	2800/3100	55/67	430/485
WB226H5PC-A2L-G	200-240vac	50/60	0.25/0.26	50/60	2800/3100	55/67	430/485

อุปกรณ์เสริม

* ดูรายละเอียดหน้า 24 *



* ราคาสินค้าไม่รวมภาษีมูลค่าเพิ่มและเปลี่ยนแปลงได้โดยไม่ต้องแจ้งให้ทราบล่วงหน้า *