



GENERAL SPECIFICATIONS

FRAME SIZE : 254x89mm.

HOUSING : ALUMINIUM ALLOY

IMPELLER : PBT THERMOPLASTIC UL94V-0

BEARING TYPE : BALL BEARING




OPERATION TEMPERATURE : -10°C ~ +65°C

RELATIVE HUMIDITY : 35% ~ 85%

MOTOR : **CAPACITOR-RUN INDUCTION MOTOR**
IMPEDANCE PROTECTED



WB259H3PC...

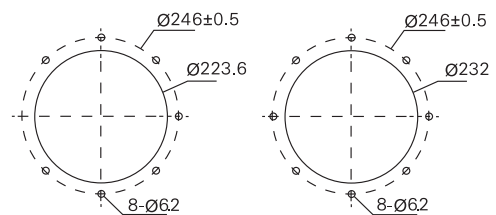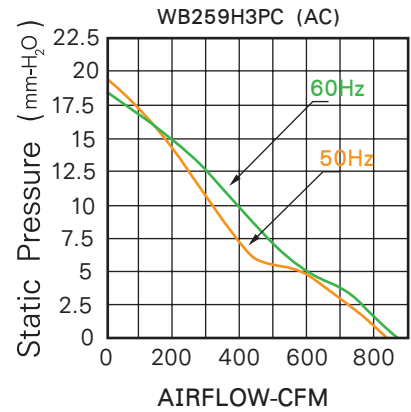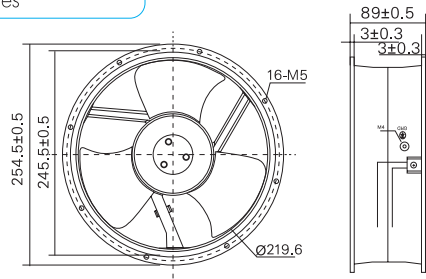



* หน่วย : mm. *

MODEL	VOLTAGE (V)	FREQ (HZ)	CURRENT (A)	POWER (W)	SPEED (RPM)	NOISE (DBA)	AIRFLOW (CFM)
WB259H3PC-A1L-G	100-125vac	50/60	0.7/0.85	95/100	2500/2850	68/70	810/880
WB259H3PC-A2L-G	200-240vac	50/60	0.6/0.7	105/135	2500/2850	68/70	810/880

อุปกรณ์เสริม






ตะแกรงรุ่น G-259



* หน่วย : mm. *






ฟิลเตอร์ WFP-806



* หน่วย : mm. *



ฟิลเตอร์กันน้ำ WFU-9806P2



* หน่วย : mm. *