

GENERAL SPECIFICATIONS

FRAME SIZE : 200x200x60mm.

HOUSING : ALUMINIUM ALLOY

IMPELLER : PBT THERMOPLASTIC UL94V-0




BEARING TYPE : BALL BEARING

OPERATION TEMPERATURE : -10°C - +65°C

RELATIVE HUMIDITY : 35% ~ 85%

MOTOR AC : **CAPACITOR-RUN INDUCTION MOTOR**
IMPEDANCE PROTECTED




MOTOR DC : **BRUSHLESS AND REVERSE POLARITY**
PROTECTED

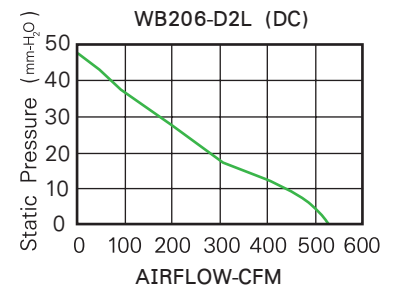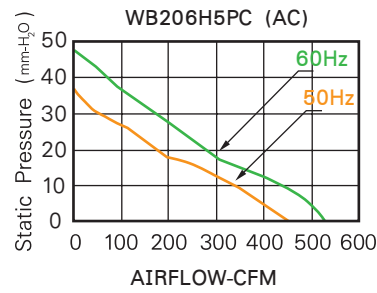

WB206-D2L...



WB206H5PC...

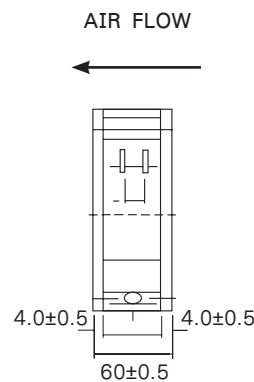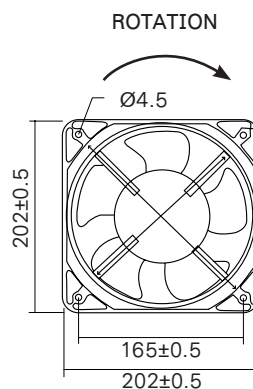

* หน่วย : mm. *

MODEL	VOLTAGE (V)	FREQ (HZ)	CURRENT (A)	POWER (W)	SPEED (RPM)	NOISE (DBA)	AIRFLOW (CFM)
WB206-D2L-G	24vdc	-	1.3	31.2	2500	58	530
WB206H5PC-A1L-G (WB226-A1LG)	100-125vac	50/60	0.40	60	2750/3050	60/65	460/530
WB206H5PC-A2L-G	200-240vac	50/60	0.30	60	2750/3050	60/65	460/530

อุปกรณ์เสริม

*ดูรายละเอียดหน้า 24 *



* ราคาสินค้าไม่รวมภาษีมูลค่าเพิ่มและเปลี่ยนแปลงได้โดยไม่ต้องแจ้งให้ทราบล่วงหน้า *