CE

SPECIFICATION

Power frequency withstand voltage : 2.5kv/1min (effective AC value)
Insulation resistance : ≥2MΩ
Allowable voltage fluctuation : ±20%
Continuous operation life : ≥30000h
Brightness : ≥100cd/m2
Comparative tracking index : CTI ≥100
Ambient temperature : -5 ˚C - +40˚C
Relative humidity : ≤ 85%
Degree of Protection : IP40
Applying frequency : AC 50~60Hz
Standard : IEC947-5-1/EN60947-5-1
Certificated : CE

AD22-22DS...



LED Pilot LampAD22 - Series

รุ่น (Model)	Rated-Voltage	Current	No.2835 LED Chips	Color	Packing/ Box
AD22-22DS-A	12 - 24VDC/AC 110-220VAC	≤ 20mA	4 Chips	Amber	10 Pcs.
AD22-22DS-B			4 Chips	Blue	10 Pcs.
AD22-22DS-G			4 Chips	Green	10 Pcs.
AD22-22DS-R			4 Chips	Red	10 Pcs.
AD22-22DS-W			4 Chips	White	10 Pcs.

AD22-22VM-S...

LED Pilot Lamp Voltmeter AD22 - Series

รุ่น (Model)	Rated-Voltage	Current	Class	COB LED Chips	Color	Packing/ Box
AD22-22VM-S-A	110-500VAC	≤ 20mA	2.5	22 Chips	Amber	10 Pcs.
AD22-22VM-S-B				22 Chips	Blue	10 Pcs.
AD22-22VM-S-G				22 Chips	Green	10 Pcs.
AD22-22VM-S-R				22 Chips	Red	10 Pcs.
AD22-22VM-S-W				22 Chips	White	10 Pcs.

AD22-22SM-A...

AD22-22SM-R...

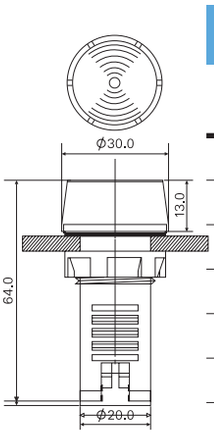

Discontinuous sound Buzzer With Flashing Light AD22 - Series

รุ่น (Model)	Rated-Voltage	Current	No.2835 LED Chips	Sound type	Sound level at 10 Cm.	Color	Packing/Box
AD22-22SM-A	12VAC/DC	≤ 20mA	4 Chips	Discontinuous sound Buzzer With Flashing light	80 dB	Amber	10 Pcs.
AD22-22SM-A	24VAC/DC						
AD22-22SM-A	220VAC						
AD22-22SM-R	12VAC/DC	≤ 20mA	4 Chips	Discontinuous sound Buzzer With Flashing light	80 dB	Red	10 Pcs.
AD22-22SM-R	24VAC/DC						
AD22-22SM-R	220VAC						