




**SPECIFICATIONS**


- Standard : IEC60947-3, GB/T 14048.4
- Rated insulation voltage (Ui) : 660/690V, 1000V
- Rated thermal current (Ith) : 16A, 32A, 40A, 63A, 80A, 100A
- Operating Frequency : 50/60Hz
- Operating efficiency : 30 times / hour
- Electrical life : AC-3 6000 times
- Protective level : IP20
- Ambient temperature : -5°C to +40°C

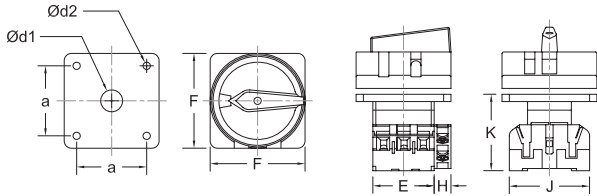

Description	Dimension (mm.)					Installation (mm.)		
	E	F	H	J	K	a	d1	d2
SAA 16/3	42	64	13.5	54	61	48	20	4.2
SAA 32/3	42	64	13.5	54	61	48	20	4.2
SAA 40/3	50	64	16	64	67	48	20	4.2
SAA 63/3	50	64	16	64	67	48	20	4.2
SAA 80/3	70	64	22.5	80	82	48	20	4.2
SAA 100/3	70	64	22.5	80	82	48	20	4.2

**Safety Switches SAA-Series with Padlock**

Connection Diagram	รุ่น (Model)	Pole	Rated Current (AC-21A)		Capacity 3Phase (AC-3)		Auxiliary		Size (mm.)
			240V	440V	240V	440V	NO	NC	
	SAA16-310010	3P	16A	16A	3KW	5.5KW	1	1	64x64
	SAA32-310010	3P	32A	32A	4KW	7.5KW	1	1	64x64
	SAA40-310010	3P	40A	40A	7.5KW	11KW	1	1	64x64
	SAA63-310010	3P	63A	63A	11KW	18.5KW	1	1	64x64
	SAA80-310010	3P	80A	80A	15KW	22KW	1	1	64x64
	SAA100-310010	3P	100A	100A	18.5KW	30KW	1	1	64x64

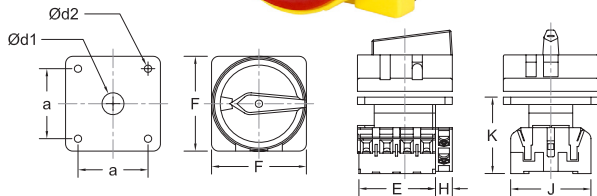

Description	Dimension (mm.)					Installation (mm.)		
	E	F	H	J	K	a	d1	d2
SAA 16/4	55	64	13.5	54	61	48	20	4.2
SAA 32/4	55	64	13.5	54	61	48	20	4.2
SAA 40/4	65	64	16	64	67	48	20	4.2
SAA 63/4	65	64	16	64	67	48	20	4.2
SAA 80/4	91	64	22.5	80	82	48	20	4.2
SAA 100/4	91	64	22.5	80	82	48	20	4.2

**Safety Switches SAA-Series with Padlock**

Connection Diagram	รุ่น (Model)	Pole	Rated Current (AC-21A)		Capacity 3Phase (AC-3)		Auxiliary		Size (mm.)
			240V	440V	240V	440V	NO	NC	
	SAA16-410010	4P	16A	16A	3KW	5.5KW	1	1	64x64
	SAA32-410010	4P	32A	32A	4KW	7.5KW	1	1	64x64
	SAA40-410010	4P	40A	40A	7.5KW	11KW	1	1	64x64
	SAA63-410010	4P	63A	63A	11KW	18.5KW	1	1	64x64
	SAA80-410010	4P	80A	80A	15KW	22KW	1	1	64x64
	SAA100-410010	4P	100A	100A	18.5KW	30KW	1	1	64x64

