




SPECIFICATIONS

- Made of industrial grade thermoplastic ABS
- IP65 IEC 60947-3, GB/T 14048.3
- Able to withstand a temperature range from -5°C to +40°C
- Chemical resistance to aqueous acids, alkalis, salt & sea water. Concentrated phosphoric & hydrochloric acids have little effect on ABS

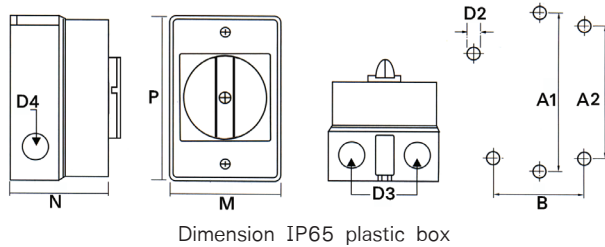

Dimension IP65 plastic box

Dimension and Installation

Description	Dimension (mm.)						Installation (mm.)			
	D3	D4	M	N	P	A1	A2	B	D2	
SAA 16/3	23	19	85	80	120	110	--	--	4.1	
SAA 32/3	23	19	85	80	120	110	--	--	4.1	
SAA 40/3	29	23	91	91	160	178	--	--	4.1	
SAA 63/3	29	23	91	91	160	178	--	--	4.1	
SAA 80/3	37.5	23	100	100	250	--	124	124	4.1	
SAA 100/3	37.5	23	100	100	250	--	124	124	4.1	

Rotary Switches SAA-Series with Padlock							IP65	
Connection Diagram	รุ่น (Model)	Pole	Rated Current (AC-21A)		Capacity 3Phase (AC-3)		Size (mm.)	
			240V	440V	240V	440V		
	SAA16-300011	3P	16A	16A	3KW	5.5KW	85x120	
	SAA32-300011	3P	32A	32A	4KW	7.5KW	85x120	
	SAA40-300011	3P	40A	40A	7.5KW	11KW	91x160	
	SAA63-300011	3P	63A	63A	11KW	18.5KW	91x160	
	SAA80-300011	3P	80A	80A	15KW	22KW	100x250	
	SAA100-300011	3P	100A	100A	18.5KW	30KW	100x250	

